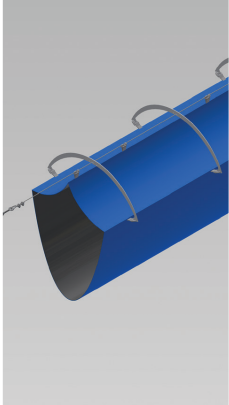
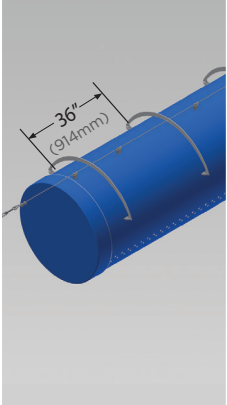


Simple installation with Track. External hanger supports easily detach for maintenance.

Cable	
<ul style="list-style-type: none"> • Light weight • Economical • Requires anchor attachments on either end for tensioning 	
Cable	Inflated
	

3 x 1 Hangers

17% Deflation

- 8" - 48" diameters (203mm - 1219mm)
- Powder coated aluminum hangers
- 1 row Track or Cable at 12 o'clock
- Fabric connection points located at 10, 12 & 2 o'clock
- Minor noise at start-up with noticeable fabric motion

