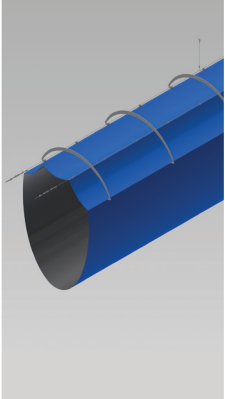
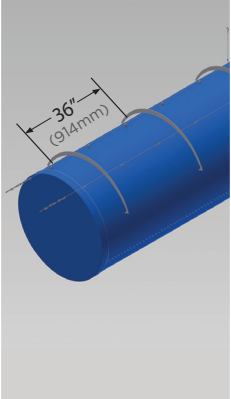


Simple installation with Track. External hanger supports easily detach for maintenance.

Cable	
<ul style="list-style-type: none"> • Light weight • Economical • Requires anchor attachments on either end for tensioning 	
Cable	Inflated
	

4 x 2 Hangers

12% Deflation

- 50" - 60" diameters (1270mm - 1524mm)
- Powder coated aluminum hangers
- 2 row Track or Cable at 11 & 1 o'clock
- Fabric connection points located at 10, 11, 1 & 2 o'clock
- Minor noise at start-up with noticeable fabric motion

